

## 150mm Concrete Slab Floor overlaid with Quarry Tile on 3mm Acoustiblok and Suspended Ceiling



### Dimensions

- **Weight:** 415.3kg/m<sup>2</sup>
- **Thickness:** 182mm with 300mm cavity (Variable)
- **Content:** 43% recycled materials

### Assembly Construction


- 12mm (27.3kg/m) Unglazed Quarry Tile.
- 3mm Acoustiblok Sound Isolation Membrane.
- 152mm (366kg/m<sup>2</sup>) Reinforced Concrete Slab.
- 300mm Suspended MS Ceiling (Variable).
- 90mm Fibreglass Insulation.
- 15mm Drywall Plasterboard.

### Testing Establishment

**NGC Testing Services Inc. Cert No: NGC 7006009**  
NGC Testing Services rates this floor configuration with an IIC (Impact Insulation Class) of 67 dB, and an STC (Sound Transmission Class) of 74. See report graphs below, showing the performance of this configuration relative to noise source frequencies.

Independently Tested Sound Transmission Loss Reference

Frequency	100Hz	125Hz	160Hz	250Hz	500Hz	1000Hz	2500Hz	5000Hz
Ln	40dB	44dB	44dB	45dB	36dB	29dB	36dB	22dB

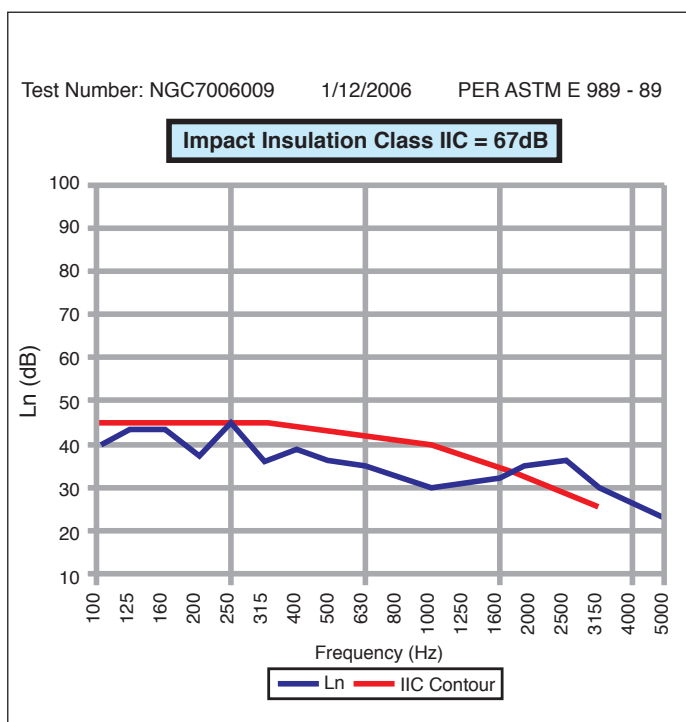

### Performance

- Sound Transmission Class 74dB
- Impact Insulation Class 67dB
- LnTw (Calculation = 110-IIC) 43dB

Impact Insulation Class (IIC) is a single number rating used to compare the performance of floor/ceiling partitions in blocking impact noise, such as footsteps and dropped objects. The higher the IIC rating number, the better the performance. An IIC of 50 is usually considered the minimum for preventing noise complaints in residential building. IIC ratings are calculated by a method similar to STC ratings (see description of STC over).

The IIC of a particular floor assembly is derived using a standard tapping machine, as stipulated in ASTM method E492.3 This machine incorporates five steel-faced hammers that strike the test floor and generate noise in a room below. The noise levels are measured and used to calculate the Impact Insulation Class (IIC), following ASTM method E989.




Acoustiblok® sound insulation

Uniclass	EPIC
L68161:P7113	F852:X724
Cl/SfB	
	Ln6 (P2)

Acoustiblok UK Limited

## 150mm Concrete Slab Floor overlaid with Quarry Tile on 3mm Acoustiblok and Suspended Ceiling

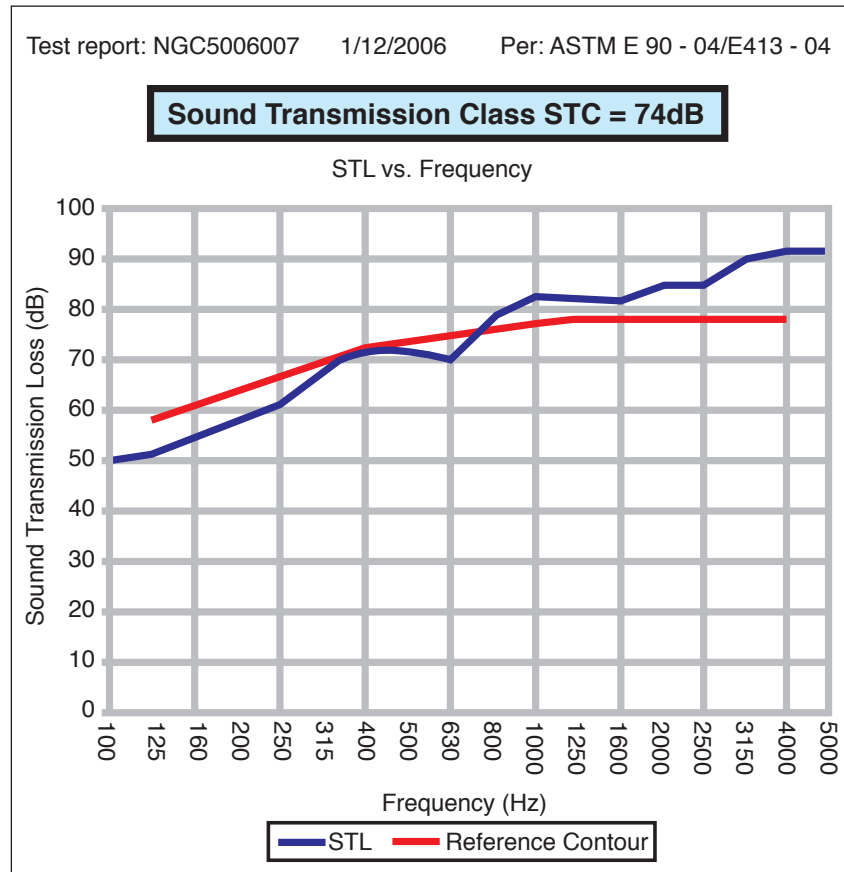

Sound Transmission Loss data for 150mm reinforced concrete slab floor with quarry tile, 16oz Acoustiblok, and gypsum board drop ceiling, STC 74 rated.

SOUND TRANSMISSION CLASS is a single number that represents the sound blocking capacity of a partition such as a wall or ceiling.

STC numbers are often referred to in architectural specifications, to assure that partitions will reduce noise levels. For performance similar to laboratory test numbers, it is necessary to adhere closely to the construction materials and techniques used in the tested partition.

STC calculations emphasize sound frequencies that match the human voice. A high STC partition will block the sound of human speech, and block noise that interferes with human speech. A high

STC number may not indicate a partition that is effective in blocking very low or very high pitched sound. STC measures sound blocking for airborne noise source only; it does not indicate how well a partition can block impact noise (objects striking the far side of the partition), or directly transmitted noise such as machinery mounted on the far side of the wall.

STC is calculated by comparing the actual sound loss measured when 18 test frequencies pass through a partition, with fixed values for each STC level. The highest STC curve that the measured sound loss numbers fit under, determines the STC rating of the tested partition.